

日期/Date
 档案员
 Filing Clerk

1


2

3

4

5

6

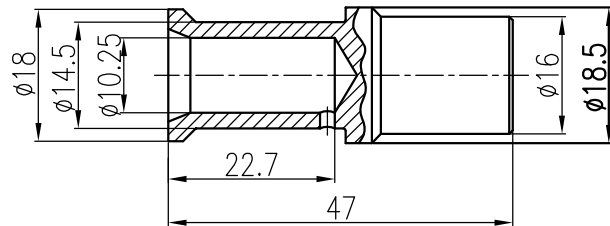


技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 250A
- 接触电阻: $\leq 0.3m\Omega$
- 线径范围: $50mm^2$
- 剥线长度: 22mm
- 最大绝缘直径: 18mm
- 冷压模具: 按照 DIN 46 235
- 压力要求: 130kN
- 可插拔次数: > 500

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 250A
- Contact resistance: $\leq 0.3m\Omega$
- Wire gauge: $50mm^2$
- Stripping length: 22mm
- Max. insulation diameter: 18mm
- Crimp dies: acc. to DIN 46 235
- Pressing force: 130kN
- Mating cycles: > 500

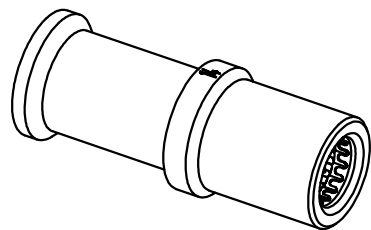

						表面处理 Finish	-			图号 Drawing No.	-
						材料 Material	-			产品代号 Part Code	CHSF250-50G
标记 Mark	次数 Number	变更描述/Description			姓名 Signature	日期 Date				产品料号 Part No.	1010281201803
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	-
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	-	-	1:1	V1.0	46.2g	-		
审核 Checked	P RAO	18.10.2010									
工艺 Process	-	-	批准 Approved	YY LIN	18.10.2010			All Dimensions in mm Original Size DIN A 4		厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	

1

2

3

4

5

6