




| 料号 Order No. | 产品代号 Part Code | 线径/Wire Gauge | | 剥线长度 Stripping Length | a | b | 重量/Weight |
|-----------------|-------------------|-------------------|--------|--------------------------|-------|------|-----------|
| 1010242101201 | M40-AMC75G-4 | 4mm ² | AWG 12 | 10mm | ∅2.85 | ∅3.9 | 5.3g |
| 1010242101301 | M40-AMC75G-6 | 6mm ² | AWG 10 | 10mm | ∅3.5 | ∅5 | 5.6g |
| 1010242101401 | M40-AMC75G-10 | 10mm ² | AWG 8 | 10mm | ∅4.5 | ∅5.7 | 5g |

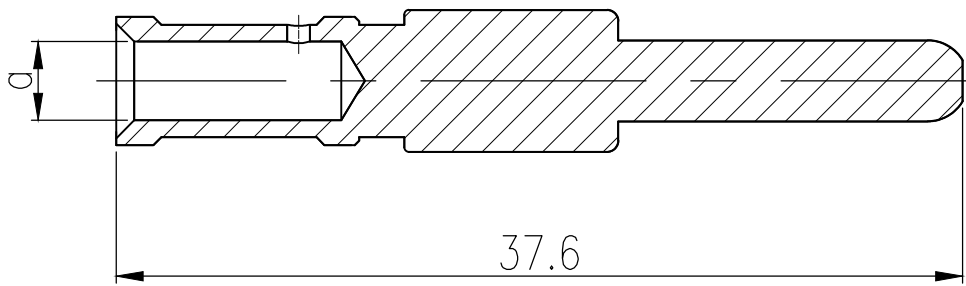

技术参数:
 - 材料: 铜合金
 - 表面处理: 镀金
 - 额定电流: 63A
 - 接触电阻: $\leq 1m\Omega$
 - 线径范围: 4/6/10mm²(12/10/8AWG)
 - 可插拔次数: >math>\geq 500</math>

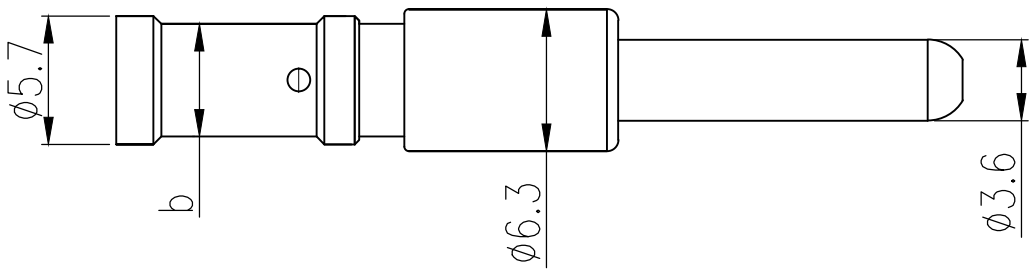

Technical specification:
 - Material: copper alloy
 - Surface: hard-gold plated
 - Rated current: 63A
 - Contact resistance: $\leq 1m\Omega$
 - Wire gauge: 4/6/10mm²(12/10/8AWG)
 - Mating cycles: >math>\geq 500</math>

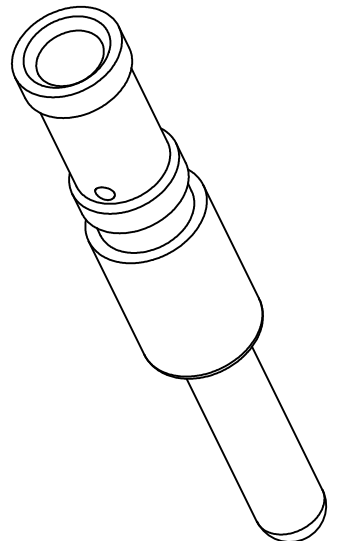

| | | | | | | | | | | | | |
|---------------|--------------|------------------|----------------|--------|-----------------|------------|-------------|---|-------------------|---|-------------------|---|
| | | | | | 表面处理 Finish | - | | | 图号 Drawing No. | - | | |
| | | | | | 材料 Material | - | | | 产品代号 Part Code | M40-AMC75G-XX | | |
| 标记 Mark | 处数 Number | 变更描述/Description | | | 签名 Signature | 日期 Date | 比例 Scale | 版本 REV. | 重量 Weight | 数量 Qty. | 产品料号 Part No. | - |
| 绘图 Drawn | ZM LIN | 07.04.2016 | 标准化 Stand. | - | - | 3:1 | V1.0 | - | - | - | 产品名称 Part Name | - |
| 审核 Checked | YY LUO | 07.04.2016 | | | | | | | | | | |
| 工艺 Process | - | - | 批准 Approved | YY LUO | 07.04.2016 | | | All Dimensions in mm Original Size DIN A 4 | | 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD | | |