

安装开孔图
 Panel cut out

1) 距离 电气针和光线电缆针距离最大27mm, 气动针距离最大26.5mm
 1) Distance for electrical and F.O. contacts max. 27mm, for pneumatic contacts max. 26.5mm

技术参数:

- 材料:

- 对接架: 不锈钢
- 固定螺栓: 铁, 镀锌

- 插入容差:

- x轴: ±1.5mm
- y轴: ±1.5mm

- 插拔次数: ≥500

产品包括: 1个架子, 4个带平头的螺栓, 用于固定对接架

Technical specification:

- Material:


- Docking frame: stainless steel
- Fixing screws: steel, zinc-plated

- Pull-in-range:

- x-axis: ±1.5mm
- y-axis: ±1.5mm

- Mechanical working life: ≥500

Range of delivery: 1 frame, 4 cheese head shoulder screws to fix the docking frame

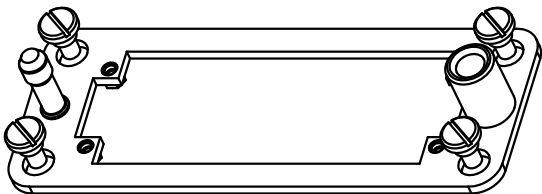

| | | | | | | | | | | | |
|---------------|--------------|------------------|----------------|-----------------|------------|---|-------------|-------------------|---|-------------------|------------------|
| | | | | | | 表面处理 Finish | - | | | 图号 Drawing No. | - |
| | | | | | | 材料 Material | - | | | 产品代号 Part Code | H24B-ADK |
| 标记 Mark | 处数 Number | 变更描述/Description | | 签名 Signature | 日期 Date | | 比例 Scale | 版本 REV. | 重量 Weight | 数量 Qty. | 产品料号 Part No. |
| 姓名/Name | 日期/Date | 姓名/Name | 日期/Date | 比例 | 版本 | 重量 | 数量 | 产品名称 Part Name | | | - |
| 绘图 Drawn | HZ LAN | 18.10.2016 | 标准化 Stand. | - | - | 1:2 | V1.0 | 105g | - | | |
| 审核 Checked | ZW WU | 18.10.2016 | | | | | | | | | |
| 工艺 Process | - | - | 批准 Approved | YY LUO | 18.10.2016 | All Dimensions in mm Original Size DIN A 4 | | | 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD | | |